


Project Thermoforming

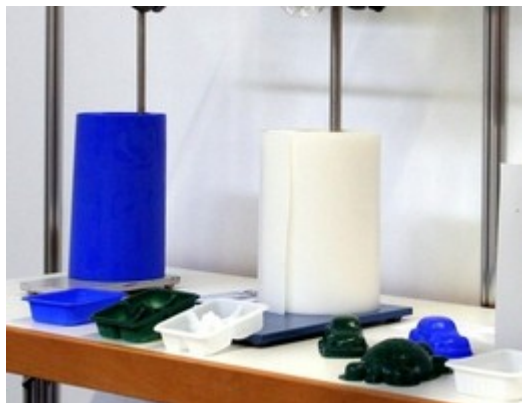

Vacuum forming, foils, blow moulding

CAPROWAX P™ 6006-C1-11-000

a compound with basic of **CAPROWAX P™6006-00-000**,
compostable material according to DIN EN 13432 (layer thickness 500 µm)
Test material: **CAPROWAX P®6006-00-000**, proofed, by MFPA, the official
material test establishment of the Bauhaus-University Weimar.

Mineral additiv (DIN EN 13432 conform) reduced hot tack to
surfaces of polishing rolls.

- for thermoforming / blow moulding components
- for sheets / plastic films

cups, covers, trays, sandboxes, decoration, bottles, tubes, hoses,
punching, stretch forming films

CAPROWAX P™ compostable of course

